
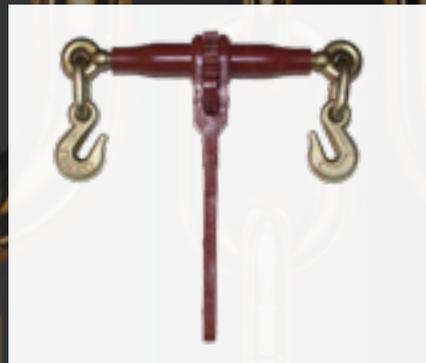
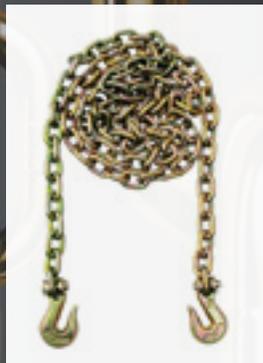
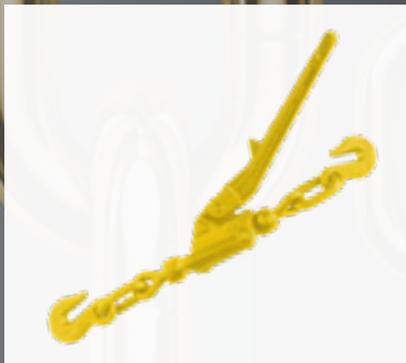


GOLD TIP[®] BINDERS

BY  ADVANTAGE

PREMIUM CARGO CONTROL PRODUCTS

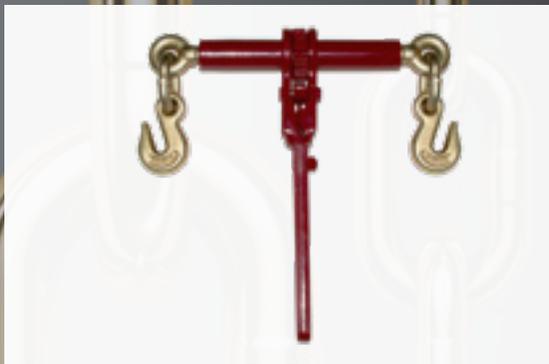

HEAVY DUTY TRUCK CATALOG



GOLD TIP® BINDERS



TABLE OF CONTENTS

WARNINGS, DEFINITIONS, AND CAUTIONS 3

GOLD TIP PREMIUM RATCHET LOAD BINDERS..... 4-10

GOLD TIP LOK-DOWN™ LOAD BINDERS 5

GOLD TIP GOLD-TIP™ LOAD BINDERS..... 6-7

GOLD TIP BIG-FOOT™ LOAD BINDERS 8

ECONOMY LOAD BINDERS..... 9

“T” HANDLE RATCHET LOAD BINDER 10

GOLD TIP PREMIUM LEVER LOAD BINDERS 11-14

GOLD TIP CARGO CONTROL 15-26

RATCHET STRAPS 15-17

TRUCK & TRAILER PARTS 18-20

BINDER, TOWING & LIFTING CHAIN..... 21-24

X100 GRADE 100 OVERHEAD LIFTING CHAIN..... 24

CORNER PROTECTORS, TARP STRAPS, CARGO BARS & HOLDERS 25-26

NOTES 27-28

INDEX..... 29

PROUD MEMBERS:



WARNINGS, DEFINITIONS, AND CAUTIONS

- Working Load Limit:** The Working Load Limit or Safe Working Load is the maximum load which should ever be applied to the product under any condition. The Working Load Limit is based on a load being uniformly applied in a straight line pull.
- Breaking Strength:** Do NOT use Breaking Strength for design or rating purposes. Use the Working Load Limit instead. Breaking Strength is an average figure at which samples have been found to break under laboratory conditions in straight line pulls with constantly increasing loads. Generally, that design factor is a 3:1 ratio. These conditions are rarely duplicated in actual use. The Breaking Strength applies to new and unused wire rod for Wire Rope, Aircraft Cable, and Chain.
- Proof Load:** The load a product can withstand during quality control test for the purpose of detecting defects and deformation in the material, usually twice the Working Load Limit.
- Matching Components:** All attachments used with chain and wire rope must be of suitable material, type and strength to provide adequate safety protection. Attachments should have Working Load Limits at least equal to the other components with which they are used.
- Inspection Warning:** No product can operate indefinitely at its rated capacity. Cable, wire rope, chain, and their attachments must be inspected regularly by a trained or qualified individual for visible damage, distortion, elongation, corrosion, cracks, nicks, or abrasion, which may cause failure or reduce the strength or ability of the product to perform safely.
- Shock Loads:** Loads which exceed the static load caused by a rapid change of movement, such as jerking, impacting, or swinging of load. Working Load Limits will not apply.
- Marking Requirements:** The US Customs law requires that the end user of imported products be informed of the country of origin. All imported products sold by Advantage Sales & Supply are marked accordingly. Re-sellers are responsible to relay this country of origin information to the end user.
- Warnings:**
- No product can operate indefinitely at its rated capacity.
 - Avoid shock loads and side loads.
 - Keep out from under a raised load.
 - Never exceed the Working Load Limit.
 - Inspect your rigging and cargo control products regularly.
- Industry Standards:** Meets or exceeds all DOT standards.

GOLD TIP[®] BINDERS

RATCHET LOAD BINDERS



TWO PIECE HANDLE PREMIUM RATCHET LOAD BINDERS

LOK-DOWN® Series Ratchet Load Binders


GRAB-GRAB



- All load bearing fittings are forged
- Quenched and tempered
- Grab hooks, links and eye bolts are yellow zinc plated
- Handle and barrel are powder coated
- Heavy duty swaged tube body
- Two piece handle
- Switch is operated by heavy duty spring

STOCK NUMBER	CHAIN SIZE	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
LKD8800	5/16"-3/8"	8"	10"	15.5"	1"	8,800	17,600	13
LKD12000	3/8"-1/2"	8"	10"	15.5"	1"	12,000	24,000	14
LKD18100	1/2"-5/8"	8"	10"	15.5"	1"	18,100	36,200	16

JAW-JAW

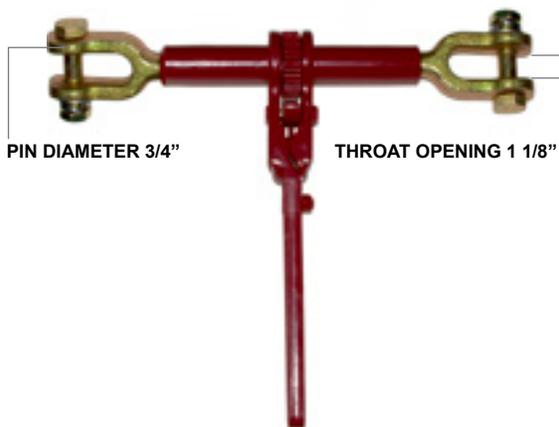

- All load bearing fittings are forged
- Quenched and tempered
- Jaw end fittings are yellow zinc plated
- Handle and barrel are powder coated
- Heavy duty swaged tube body
- Two piece handle
- Pin comes complete with nut and lock-washer
- Switch is operated by heavy duty spring

STOCK NUMBER	CHAIN SIZE	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
LKD16000JJ	1/2"-5/8"	8"	10"	15.5"	1"	16,000	32,000	14

ONE PIECE HANDLE PREMIUM RATCHET LOAD BINDERS

GOLD-TIP® Series Ratchet Load Binders

GRAB-GRAB



- All load bearing fittings are forged
- Quenched and tempered
- Grab hooks, links and eye bolts are yellow zinc plated
- Handle and barrel are powder coated
- Heavy duty swaged & tapered tube body
- One piece handle

STOCK NUMBER	CHAIN SIZE	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
GT7100	5/16"-3/8"	8"	10"	15.5"	7/8"	7,100	14,200	9
GT12000	3/8"-1/2"	8"	10"	15.5"	1"	12,000	24,000	14
GT13000	1/2"-5/8"	8"	10"	15.5"	1"	13,000	26,000	16

EYE-EYE



- All load bearing fittings are forged
- Quenched and tempered
- Eye bolts are yellow zinc plated
- Handle and barrel are powder coated
- Heavy duty swaged & tapered tube body
- One piece handle

STOCK NUMBER	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
GT13000EE	8"	10"	15.5"	1"	13,000	26,000	10

ONE PIECE HANDLE PREMIUM RATCHET LOAD BINDERS WITH SLIP HOOKS

GOLD-TIP® Series Ratchet Load Binders

GRAB-SLIP



- All load bearing fittings are forged
- Quenched and tempered
- Grab hook, links, slip hook and eye bolts are yellow zinc plated
- Handle and barrel are powder coated
- Heavy duty swaged & tapered tube body
- One piece handle

STOCK NUMBER	CHAIN SIZE	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
GT12000GS	3/8"-1/2"	8"	10"	15.5"	1"	12,000	24,000	17

GRAB-GRAB-SLIP



- All load bearing fittings are forged
- Quenched and tempered
- Grab hooks, links, slip hook and eye bolts are yellow zinc plated
- Handle and barrel are powder coated
- Heavy duty swaged & tapered tube body
- One piece handle

STOCK NUMBER	CHAIN SIZE	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
GT15000GGS	1/2"-5/8"	8"	10"	15.5"	1"	15,000	30,000	18

ONE PIECE HANDLE PREMIUM HIGH CAPACITY RATCHET LOAD BINDERS

BIG-FOOT® Series Ratchet Load Binders

Designed for **EXTREME** loads

GRAB-GRAB



- All load bearing fittings are forged
- Quenched and tempered
- Grab hooks, links and eye bolts are zinc plated
- Handle and barrel are powder coated
- Heavy duty swaged & tapered tube body
- One piece handle

STOCK NUMBER	CHAIN SIZE	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
BFT15000	3/8"-1/2"	8"	10"	15.5"	1"	15,000	30,000	16
BFT16000	1/2"-5/8"	8"	10"	15.5"	1"	16,000	32,000	18

ECONOMY RATCHET LOAD BINDERS

ECONOMY Ratchet Load Binders



- All load bearing fittings are forged
- Quenched and tempered
- Entire assembly is powder coated
- Heavy duty swaged tube body
- One piece handle

STOCK NUMBER	CHAIN SIZE	WORKING LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
RBNDR250	1/4" Grade 30, 1/4" Grade 43	2,600	5
RBNDR375	5/16" Grade 70, 3/8" Grade 70	6,600	11
RBNDR500	3/8" Grade 70, 1/2" Grade 43	9,200	13
RBNDR625	1/2" Grade 70, 5/8" Grade 43	11,300	16

The most reliable economy load binder in the trucking industry!

“T” HANDLE RATCHET LOAD BINDER

“T” HANDLE Ratchet Load Binder

GRAB-GRAB



- All load bearing fittings are forged
- Quenched and tempered
- Heavy duty swaged tube body
- Handle and barrel are powder coated
- Hooks have 360° rotation
- Grab hook, links and eye bolts are yellow zinc plated
- One piece “T” handle for easy grip
- Great for the towing industry

STOCK NUMBER	CHAIN SIZE	TAKE-UP	BARREL LENGTH	HANDLE LENGTH	SCREW DIAMETER	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
RBNDR7100T	5/16"-3/8"	6"	8"	9"	7/8"	7,100	14,200	10

PREMIUM LEVER LOAD BINDERS



PREMIUM LEVER LOAD BINDERS

LEVER TYPE Binder



- All load bearing fittings are forged
- Quenched and tempered
- Entire assembly is powder coated
- Hooks have 360° rotation

STOCK NUMBER	CHAIN SIZE	WORKING LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
LBNDR250	1/4" Grade 30, 1/4" Grade 43	2,600	4
LBNDR375	5/16" Grade 70, 3/8" Grade 43	5,400	7
LBNDR500	3/8" Grade 70, 1/2" Grade 43	9,200	13

PREMIUM LEVER LOAD BINDERS

COMPRESSION SPRING Lever Load Binder



- All load bearing fittings are forged
- Quenched and tempered
- Entire assembly is powder coated
- Hooks have 360° rotation
- Steel coil spring acts as a shock-absorber
- Great for rubber tired vehicle carriers

STOCK NUMBER	CHAIN SIZE	TAKE-UP	HANDLE LENGTH	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
LBNDR6600SPRING	5/16"-3/8"	4.5"	16"	6,600	13,200	15
LBNDR9200SPRING	3/8"-1/2"	4.5"	18"	9,200	18,400	19

SAFETY RECOILLESS Lever Load Binder



- All load bearing fittings are forged
- Quenched and tempered
- Entire assembly is powder coated
- Hooks have 360° rotation
- Kickback on handle is reduced by two-stage design
- Safest choice for lever binders

STOCK NUMBER	CHAIN SIZE	TAKE-UP	HANDLE LENGTH	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
LBNDR5400RECOIL	5/16"-3/8"	4.5"	16"	5,400	10,800	10

PREMIUM LEVER LOAD BINDERS

CLAW-CLAW Lever Load Binder



- Quenched and tempered
- Entire assembly is powder coated
- Both hooks rotate 360°
- All load bearing fittings are forged
- Commonly used in Automotive Frame Straightening operations
- Claw hook is designed to cradle the entire link

STOCK NUMBER	CHAIN SIZE	TAKE-UP	HANDLE LENGTH	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
LBNDR6600CC	5/16"-3/8"	4.5"	16"	6,600	13,200	11



LIGHT DUTY Lever Load Binder



- Steel formed wire "J" Hooks
- Forged handle
- Quenched and tempered
- Entire assembly is powder coated
- One hook rotates 360°

STOCK NUMBER	TAKE-UP	HANDLE LENGTH	WORKING LOAD LIMIT (LBS.)	PROOF LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)
LBNDRLIGHTDUTY	3"	9.5"	375	750	2

GOLD TIP® CARGO CONTROL RATCHET STRAPS

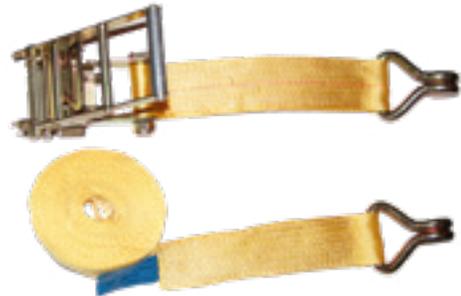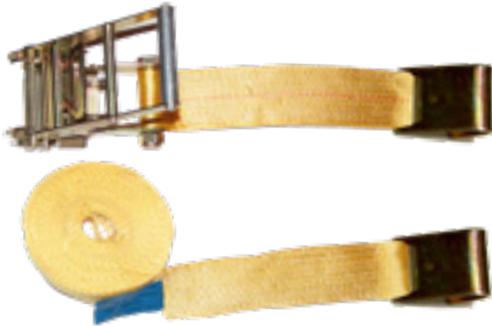

SAFETY RATCHET STRAPS



1" POLYESTER RATCHET TIE-DOWNS

WITH S- OR J-HOOKS

SIZE	STOCK NUMBER	COLOR	END FITTING	BREAKING STRENGTH (LBS.)
1" x 8'	STRAP1X8	Yellow	Black Vinyl S-Hook	3,000
1" x 8'	STRAP1X8B	Black	Black Vinyl S-Hook	3,000
1" x 12'	STRAP1X12	Yellow	Black Vinyl S-Hook	3,000
1" x 15'	STRAP1X15	Yellow	Black Vinyl S-Hook	3,000
1" x 15'	STRAP1X15B	Black	Black Vinyl S-Hook	3,000
1" x 15'	STRAP1X15BLU	Blue	Black Vinyl S-Hook	3,000
1" x 15'	STRAP1X15J	Yellow	Yellow Zinc Wire J-Hook	3,000

Custom sizes available from our in-house sew shop.



2" YELLOW POLYESTER RATCHET TIE-DOWNS

WITH FLAT, CHAIN GRAB, OR J-HOOKS

SIZE	STOCK NUMBER	END FITTINGS	RATCHET	BREAKING STRENGTH (LBS.)	WEIGHT/PIECE (LBS.)
2" x 8'	STRAP2X8J	J-Hooks	Long/Wide Handle	12,000	4
2" x 15'	STRAP2x15	Flat Hooks	Long/Wide Handle	12,000	5
2" x 15'	STRAP2X15J	J-Hooks	Long/Wide Handle	12,000	5
2" x 27'	STRAP2X27	Flat Hooks	Long/Wide Handle	12,000	6
2" x 27'	STRAP2X27J	J-Hooks	Long/Wide Handle	12,000	6
2" x 27'	STRAP2x27CG	Chain Grab Hooks	Long/Wide Handle	12,000	14

Custom sizes available from our in-house sew shop.

SAFETY RATCHET STRAPS



3" YELLOW POLYESTER RATCHET TIE-DOWNS

WITH FLAT OR J-HOOKS

SIZE	STOCK NUMBER	HOOKS	RATCHET	BREAKING STRENGTH (LBS.)	WEIGHT/PIECE (LBS.)
3" x 30'	STRAP3X30RFH	Flat Hooks	Long Handle	12,000	15
3" x 30'	STRAP3X30RJH	J-Hooks	Long Handle	12,000	15

Custom sizes available from our in-house sew shop.

4" YELLOW POLYESTER RATCHET TIE-DOWNS

WITH FLAT OR CHAIN GRAB HOOKS

SIZE	STOCK NUMBER	HOOKS	RATCHET	BREAKING STRENGTH (LBS.)	WEIGHT/PIECE (LBS.)
4" x 30'	STRAP4X30F	Flat Hooks	Long Handle	15,000	19
4" x 30'	STRAP4X30CG	Chain Grab Hooks	Long Handle	15,000	22

Custom sizes available from our in-house sew shop.



2" & 4" YELLOW POLYESTER REPLACEMENT STRAPS

WITH FLAT OR J-HOOKS

SIZE	STOCK NUMBER	HOOKS	BREAKING STRENGTH (LBS.)	WEIGHT/PIECE (LBS.)
2" x 26"	STRAP2X26R	Flat Hook	10,000	3
2" x 26"	STRAP2X26JR	J-Hook	10,000	3
4" x 30'	STRAP4X30	Flat Hook	15,000	6



18" CHAIN ANCHOR WITH PEAR LINK

FOR 2" WEBBING

STOCK NUMBER	CHAIN	HOOK	WORKING LOAD LIMIT (LBS.)	BREAKING STRENGTH (LBS.)	WEIGHT (LBS.)
Y3816	5/16" G70	5/16" G70	3,335	10,000	4



18" CHAIN ANCHOR WITH 3" DELTA RING

FOR 3" OR 4" WEBBING

STOCK NUMBER	CHAIN	HOOK	WORKING LOAD LIMIT (LBS.)	BREAKING STRENGTH (LBS.)	WEIGHT/PIECE (LBS.)
Y3816A	3/8" G70	3/8" G70	5,000	15,000	4

GOLD TIP® CARGO CONTROL

TRUCK & TRAILER PARTS



SECURE WINCH BINDERS

Bolt-On Standard



Bolt-On Low Profile



Sliding Standard



Weld-On Standard



Weld-On Deep Pocket



STOCK NUMBER	DESCRIPTION	SIZE	LENGTH	WIDTH	HEIGHT	TRAILER MOUNT POSITION	WEIGHT/PIECE (LBS.)
TWBOSTD	4" Bolt-On	Standard	4 7/8"	5 5/16"	3 9/16"	Bottom	10
TWBOLP	4" Bolt-On	Low Profile	4 7/8"	4 5/16"	4"	Side	9
TWSLDSTD	4" Sliding	Standard	5"	5 1/2"	4"	Bottom	11
TWWOSTD	4" Weld-On	Standard	4 7/8"	5 5/16"	3 9/16"	Bottom	8
TWWODEEP	4" Weld-On	Deep Pocket	5"	7"	4"	Bottom	11

WINCH BARS



STANDARD



COMBINATION

STANDARD WINCH BAR

STOCK NUMBER	FINISH	LENGTH	WEIGHT/PIECE (LBS.)
Y709	Painted Black	32.5"	5

COMBINATION WINCH BAR

STOCK NUMBER	FINISH	LENGTH	WEIGHT/PIECE (LBS.)
Y709A	Painted Black	37"	6

WELD-ON PARTS

WELD-ON D-RING



- The rings come with weld-on mounting brackets
- Self colored
- Not suitable for overhead lifting

STOCK NUMBER	WORKING LOAD LIMIT (LBS.)	BREAKING STRENGTH (LBS.)	MATERIAL	WEIGHT / PIECE (LBS.)	DESCRIPTION
J-704	3,000	12,000	C-1045	0.5	1/2" forged D-ring w/ weld-on or bolt-on mounting bracket
J-705	4,500	18,000	C-1045	0.7	5/8" forged D-ring w/ weld-on mounting bracket
J-706	6,625	26,500	C-1045	1.0	3/4" forged D-ring w/ weld-on mounting bracket
J-707	11,685	46,750	C-1045	1.3	1" forged D-ring w/ weld-on mounting bracket

Welding is to be performed by a qualified welder using a qualified procedure in accordance with the American Welding Society.

WELD-ON CHAIN RETAINER



- Weld on design for easy chain attachment
- Self colored
- Not suitable for overhead lifting

STOCK NUMBER	WORKING LOAD LIMIT (LBS.)	BREAKING STRENGTH (LBS.)	WEIGHT/PIECE (LBS.)	DESCRIPTION
CR10000	2,500	10,000	0.5	Fits 1/4"-5/16" chain
CR20000	5,000	20,000	1.3	Fits 5/16"-3/8" chain

Welding is to be performed by a qualified welder using a qualified procedure in accordance with the American Welding Society.

GOLD TIP[®] CARGO CONTROL BINDER, TOWING & LIFTING CHAIN



X100[®]
by **ADVANTAGE**

GOLD TIP® CARGO CONTROL CHAIN BINDER CHAINS

GRADE 70 TRANSPORT BINDER CHAIN WITH GRAB HOOK EACH END



- Every link has been proof tested to 2 times the working load
- Grade 70 transport chain is used when higher working loads or DOT regulations require stronger chain
- DOT compliant
- Not suitable for overhead lifting

SIZE	STOCK NUMBER	GRADE/FINISH	WORKING LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)	PIECES/DRUM
5/16" X 16'	G70BC312X16	Gr 70/Yellow Zinc	4,700	16	25
5/16" X 20'	G70BC312X20	Gr 70/Yellow Zinc	4,700	23	25
5/16" X 25'	G70BC312X25	Gr 70/Yellow Zinc	4,700	26	20
3/8" X 16'	G70BC375X16	Gr 70/Yellow Zinc	6,600	26	25
3/8" X 20'	G70BC375X20	Gr 70/Yellow Zinc	6,600	32	20
3/8" X 25'	G70BC375X25	Gr 70/Yellow Zinc	6,600	37	15
1/2" X 10'	G70BC500X10	Gr 70/Yellow Zinc	11,300	46	10
1/2" X 20'	G70BC500X20	Gr 70/Yellow Zinc	11,300	52	10
1/2" X 25'	G70BC500X25	Gr 70/Yellow Zinc	11,300	65	5

Custom lengths and hooks available upon request.

GRADE 80 BINDER CHAINS WITH GRAB HOOKS



- Every link has been proof tested to 2 times the working load
- Grade 80 alloy chain is used when higher working loads or DOT regulations require stronger chain
- DOT compliant
- Approved by OSHA for overhead lifting with proper hooks

SIZE	STOCK NUMBER	GRADE/FINISH	WORKING LOAD LIMIT (LBS.)	WEIGHT/PIECE (LBS.)	PIECES/DRUM
5/16" X 16'	G80BC312X16	Gr 80/Black Lacquer	4,500	16	25
5/16" X 20'	G80BC312X20	Gr 80/Black Lacquer	4,500	23	25
5/16" X 25'	G80BC312X25	Gr 80/Black Lacquer	4,500	26	20
3/8" X 16'	G80BC375X16	Gr 80/Black Lacquer	7,100	26	25
3/8" X 20'	G80BC375X20	Gr 80/Black Lacquer	7,100	32	20
3/8" X 25'	G80BC375X25	Gr 80/Black Lacquer	7,100	37	15
1/2" X 10'	G80BC500X10	Gr 80/Black Lacquer	12,000	46	10
1/2" X 20'	G80BC500X20	Gr 80/Black Lacquer	12,000	52	10
1/2" X 25'	G80BC500X25	Gr 80/Black Lacquer	12,000	65	10

Custom lengths and hooks available upon request. Larger sizes available upon request.

CARGO CONTROL CHAIN

TOWING & TIE-DOWN CHAINS

GRADE 70 CARGO CONTROL CHAIN



- Every link has been proof tested to 2 times the working load
- Grade 70 transport chain is used when higher working loads or DOT regulations require stronger chain
- DOT compliant
- Not suitable for overhead lifting

YELLOW ZINC

SIZE	STOCK NUMBER	FEET/DRUM	WORKING LOAD LIMIT (LBS.)	WEIGHT/FOOT (LBS.)
1/4"	G70250	400', 800' drum	3,150	0.63
5/16"	G70312	275', 550' drum	4,700	0.93
3/8"	G70375	200', 400' drum	6,600	1.41
1/2"	G70500	100', 200' drum	11,300	2.4
5/8"	G70625	75', 150' drum	15,800	3.53
1/4"	G70250X133	133' pail	3,150	0.63
5/16"	G70312X92	92' pail	4,700	0.93
3/8"	G70375X66	66' pail	6,600	1.41
1/2"	G70500X33	33' pail	11,300	2.4

Custom lengths available upon request.

GRADE 80 ALLOY CHAIN



- Every link has been proof tested to 2 times the working load
- Grade 80 lifting chain is used when higher working loads or DOT regulations require stronger chain
- Grade 80 alloy chain is approved by OSHA for overhead lifting
- DOT compliant

BLACK LACQUER

SIZE	STOCK NUMBER	FEET/DRUM	WORKING LOAD LIMIT (LBS.)	WEIGHT/FOOT (LBS.)
9/32"	G80281	400', 800'	3,500	0.72
5/16"	G80312	275', 550'	4,500	1.06
3/8"	G80375	200', 400'	7,100	1.5
1/2"	G80500	100', 200'	12,000	2.61
5/8"	G80625	75', 150'	18,100	3.61

Custom lengths available upon request. Larger sizes available upon request.

X100[®] GRADE 100 CHAIN & CHAIN SLINGS

OVERHEAD LIFTING CHAINS

X100 GRADE 100 CHAIN



- Every link has been proof tested to 2 times the working load
- All X100 Grade 100 chain is made from 8620 alloy steel and meets or exceeds all existing OSHA, Government, and NACM specification requirements
- X100 Chain is suitable for cargo control and overhead lifting
- X100 Grade 100 Chain Slings Assemblies are compliant with ASME B30.9

SHOT BLAST FINISH

STOCK NUMBER	SIZE	MATERIAL DIAMETER	INSIDE WIDTH	INSIDE LENGTH	FEET/DRUM	WEIGHT/FOOT	WORKING LOAD LIMIT
X100281	9/32"	0.283"	.420"	0.85"	800'	.74 lbs.	4,300 lbs.
X100312	5/16"	0.315"	.500"	1.04"	550'	.94 lbs.	5,700 lbs.
X100375	3/8"	0.394"	.575"	1.26"	400'	1.48 lbs.	8,800 lbs.
X100500	1/2"	0.512"	.768"	1.64"	200'	2.55 lbs.	15,000 lbs.
X100625	5/8"	0.630"	.930"	2.00"	150'	3.83 lbs.	22,600 lbs.
X100750	3/4"	0.787"	1.15"	2.50"	100'	5.78 lbs.	35,300 lbs.

X100 GRADE 100 CHAIN SLINGS

CHAIN SIZE	SINGLE-LEG AT 90° ANGLE	DOUBLE-LEG AT 60° ANGLE	DOUBLE-LEG AT 45° ANGLE	DOUBLE-LEG AT 30° ANGLE	TRIPLE/ QUADRUPLE AT 60° ANGLE	TRIPLE/ QUADRUPLE AT 45° ANGLE	TRIPLE/ QUADRUPLE AT 30° ANGLE	CHAIN SIZE
9/32"	4,300	7,400	6,100	4,300	11,200	9,100	6,400	9/32"
5/16"	5,700	9,900	8,100	5,700	14,800	12,100	8,500	5/16"
3/8"	8,800	15,200	12,400	8,800	22,900	18,700	13,200	3/8"
1/2"	15,000	26,000	21,200	15,000	39,000	31,800	22,500	1/2"
5/8"	22,600	39,100	32,000	22,600	58,700	47,900	33,900	5/8"
3/4"	35,300	61,100	49,900	35,300	91,700	74,900	53,000	3/4"

Capacities above are rated in pounds (lbs.).

1ST LETTER INDICATES:

- S = Single-Leg
- D = Double-Leg
- T = Triple-Leg
- Q = Quadruple-Leg

2ND LETTER INDICATES:

- O = Oblong Link
- S = Sling Hook
- G = Grab Hook
- F = Foundry Hook

3RD LETTER INDICATES:

- O = Oblong Link
- S = Sling Hook
- G = Grab Hook
- F = Foundry Hook



GOLD TIP® CARGO CONTROL

**CORNER PROTECTORS, TARP STRAPS,
CARGO BARS & HOLDERS**



CORNER PROTECTORS, TARP STRAPS, CARGO BARS & HOLDERS



CORNER PROTECTORS

STOCK NUMBER	DESCRIPTION	WEIGHT/PIECE (LBS.)
4CP	Plastic Corner Protector for 2", 3", and 4" webbing	0.4
2RP	Rubber Corner Protector for 2" webbing	0.5
4RP	Rubber Corner Protector for 3" and 4" webbing	1.2



RUBBER TARP STRAPS

STOCK NUMBER	OVERALL LENGTH	STRAP LENGTH	S-HOOK DIAMETER	END FITTINGS
TARPSTRAP9	13"	9"	3/16"	S-Hook
TARPSTRAP15	19"	15"	3/16"	S-Hook
TARPSTRAP21	25"	21"	3/16"	S-Hook
TARPSTRAP31	35"	31"	3/16"	S-Hook
TARPSTRAP41	45"	41"	3/16"	S-Hook

Made with EPDM synthetic rubber. S-Hooks are electrogalvanized.



CARGO BAR

STOCK NUMBER	DESCRIPTION	REACH MIN/MAX	TUBE DIAMETER	ELECTROGALVANIZED END FITTINGS
CBAR	Steel Cargo Bar	89"-104"	1.5"	2" x 4" Rubber



CARGO BAR HOLDER

STOCK NUMBER	DESCRIPTION
CBARHOLDER	Two piece steel Cargo Bar Holder with rubber insert

INDEX

GOLD-TIP® RATCHET LOAD BINDERS

LOK-DOWN™ Ratchet Load Binders.....5
GOLD-TIP™ Ratchet Load Binders6-7
BIG-FOOT™ Ratchet Load Binders8
 ECONOMY Ratchet Load Binders9
 “T” HANDLE Ratchet Load Binders.....10

PREMIUM LEVER LOAD BINDERS


LEVER TYPE Lever Load Binders.....12
 COMPRESSION SPRING Lever Load Binders13
 RECOILLESS Lever Load Binders.....13
 CLAW-CLAW Lever Load Binders.....14
 LIGHT DUTY Lever Load Binders14

GOLD-TIP® CARGO CONTROL

SAFETY RATCHET STRAPS16-17
 1” Polyester Ratchet Tie-Downs.....16
 2” Yellow Polyester Ratchet Tie-Downs16
 3” Yellow Polyester Ratchet Tie-Downs17
 4” Yellow Polyester Ratchet Tie-Downs17
 2” & 4” Polyester Replacement Straps17
 18” Chain Anchors17
TRUCK & TRAILER PARTS.....18-20
 Winch Binders19
 Winch Bars.....19
WELD-ON PARTS20
 Weld-On D-Rings.....20
 Weld-On Chain Retainers20
BINDER, TOWING, & LIFTING CHAIN.....21-24
 Grade 70 Binder Chains22
 Grade 80 Binder Chains22
 Grade 70 Towing & Tie-Down Chains.....23
 Grade 80 Towing & Tie-Down Chains.....23
 X100 Grade 100 Overhead Lifting Chain.....24
 X100 Grade 100 Chain Assemblies24
CORNER PROTECTORS, TARP STRAPS, CARGO BARS & HOLDERS.....25-26
 Corner Protectors.....26
 Rubber Tarp Straps26
 Cargo Bars.....26
 Cargo Bar Holders26




GOLD TIP[®] BINDERS

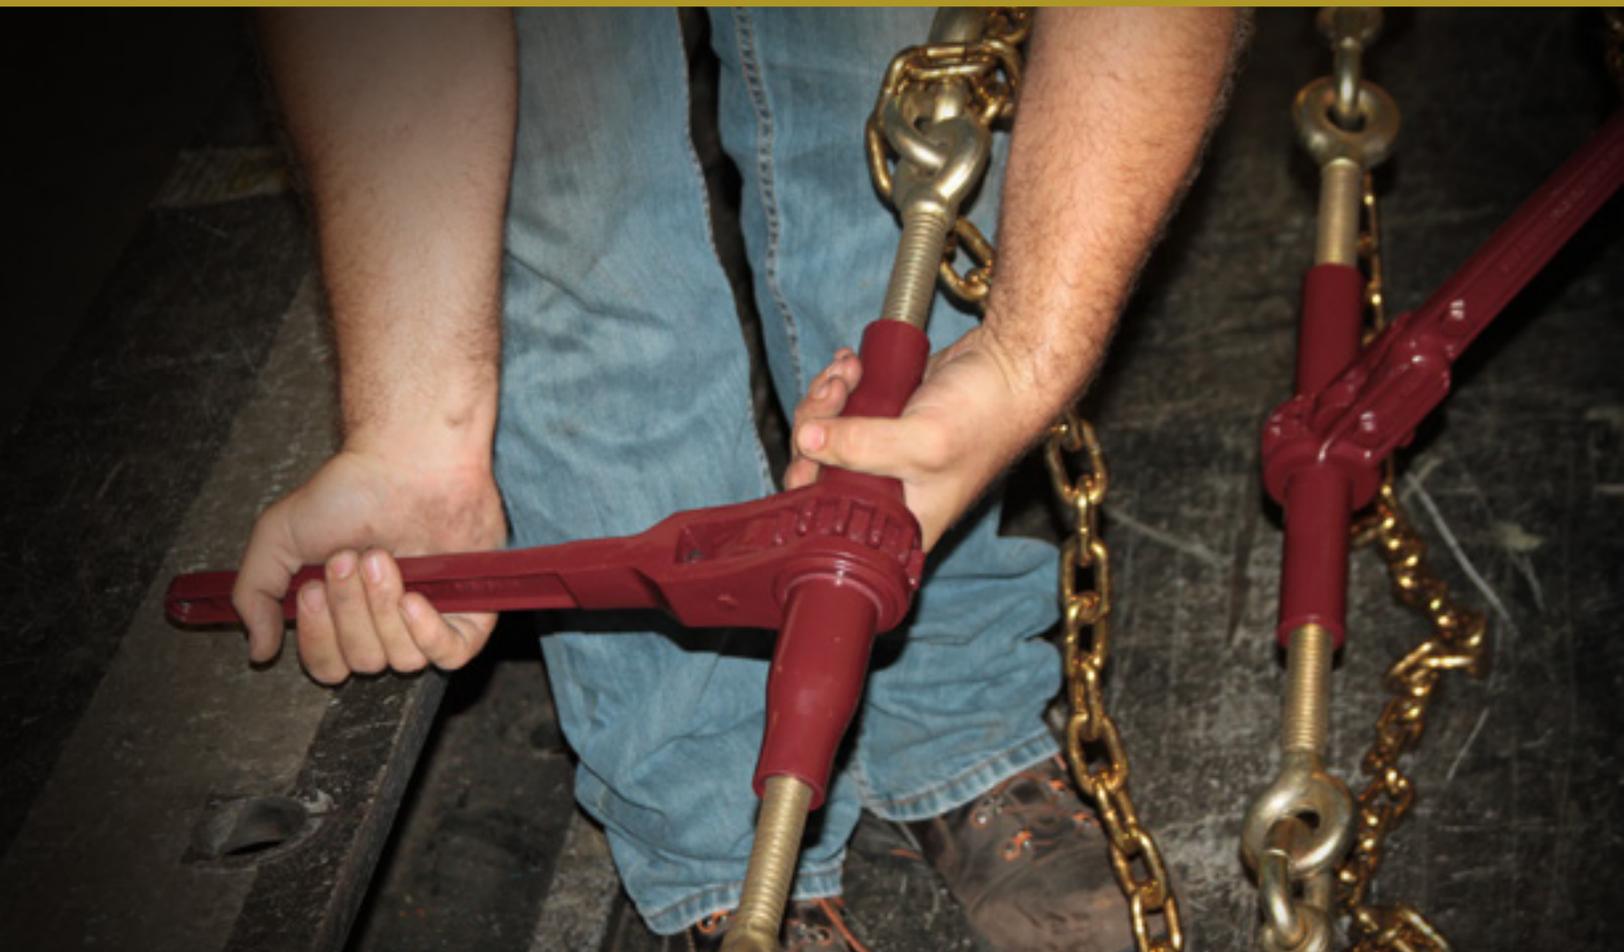

GOLD TIP® BINDERS

BY  ADVANTAGE

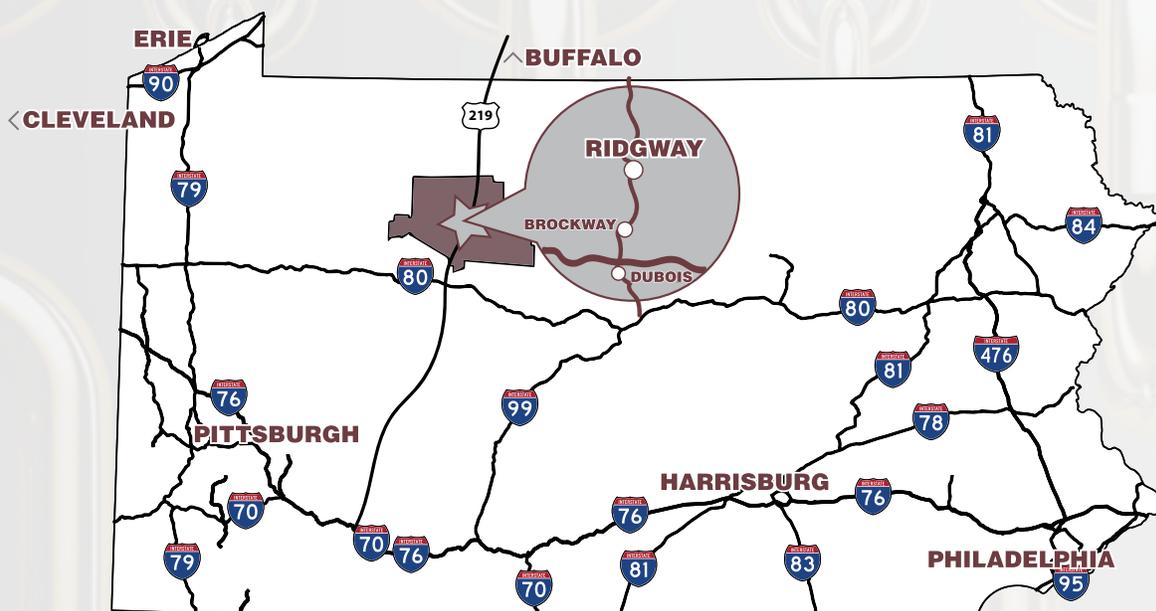

ADVANTAGE SALES & SUPPLY, INC.

99 Servidea Drive

Ridgway, PA 15853

PHONE: (814) 772-4766

FAX: (814) 772-4767

TOLL FREE: 800-216-2183

Gold-Tip® HEAVY DUTY TRUCK CATALOG

2019
\$5.00